


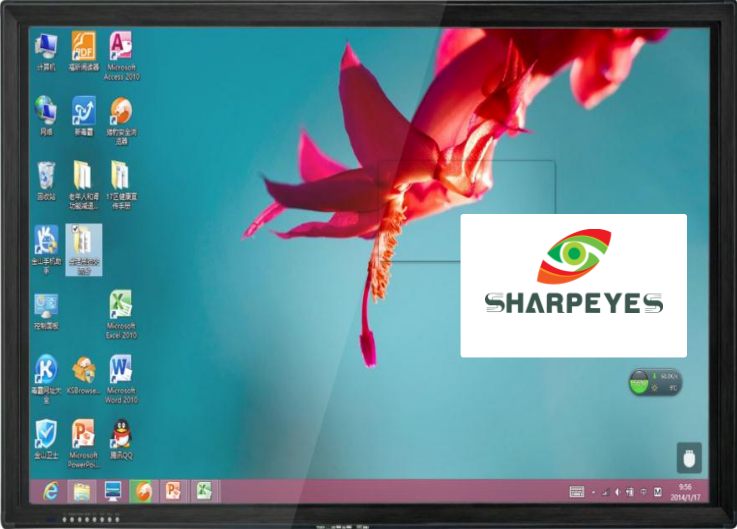

# SHARPEYES INTERACTIVE TOUCH PANEL DISPLAY 75SHV

<p style="text-align: center;"><b>Image</b></p>		
<p style="text-align: center;"><b>Model</b></p>	<p><b>SHV75</b></p>	
<p style="text-align: center;"><b>LED</b></p>	<p>LED panel size :</p>	<p>74.5"</p>
	<p>Touch screen monitor size (with hot keys):</p>	<p>76.2"</p>
	<p>LED Brand :</p>	<p>CMO</p>
<p style="text-align: center;"><b>Packing parameters</b></p>	<p>External size ( mm ) :</p>	<p>1788*1038*111 ( without wall mount )</p>
	<p>Touch size ( mm ) :</p>	<p>1691*943</p>
	<p>Package size ( mm ) :</p>	<p>1930*1148*273</p>
	<p>Net weight :</p>	<p>70kg</p>
	<p>Gross weight :</p>	<p>95kg</p>
<p style="text-align: center;"><b>Power parameters</b></p>	<p>Power :</p>	<p>&lt; 400W</p>
	<p>standby power :</p>	<p>≤5W</p>
<p style="text-align: center;"><b>Display parameters</b></p>	<p>Active display area :</p>	<p>1650.24(H)x928.26(V)</p>
	<p>Pixel size:</p>	<p>0.143 (H) x 0.430 (V)mm</p>
	<p>Display colors :</p>	<p>1.07G colors (8-bit+FRC).</p>
	<p>Contrast :</p>	<p>5000:1</p>
	<p>Resolution :</p>	<p>3840*2160 pixels</p>

	Brightness:	350cd/m <sup>2</sup>
	Viewing angle:	176 degree
<b>Port parameters</b>	INPUT HDMI	3840*2160 60HZ downward compatibility
	OUT HDMI	1080P/1080i/720P/480P/480i
	Sound output:	2X10W
<b>Output port</b>	INPUT HDMI	2Line (The inside have use 1 line ) HDMI 2.0;HDCP 1.4
	OUT HDMI	1 Line HDMI 1.4;HDCP 1.4
<b>Touch parameters</b>	Touch technology:	Infrared sensor tube , tube more than 300 pairs
	Touch point :	10 people write , 32touch point
	Touch mode :	single touch、 multi touch、 Mouse click three mode can swich
	Touch objects :	finger,pen or any other opaque objects
	Touch size :	Diameter≥7mm , Recommend≥ 7 mm
	Resolution :	32767*32767
	Responsible time :	1) single point First dot(click):8ms, continuously(writing):3ms 2) multipoint click:firstdot(click):8ms,continuously(writing):8ms 3) Mouse click:first dot(click):8ms,continuously(writing):8ms
	Cursor speed :	single point : up to300dots/s      Multi point、 Mouse click:125dots/s
	Operating life :	up to 60,000,000 times , single touch、 multi touch、 Mouse click
	Touch panel power:	USB power supply (4.6-5V,DC)
	Power :	≤1w
	Multi touch operation:	Capacitive WIN7,support 2-10 touch point,support WIN7 Gesture recognition
	Calibration:	HID devices standard, accord with Win7 Win 8 multi-touch protocol, no need special software to calibrate still can use win7, just use Table PC setting to finish the calibration.
	Anti-light decay function	Anti-light decay circuits to prevent the performance degradation caused by long working hours
LED Test Software:	Supply touch screen LED test software to test the function of each couple of the LED lights and the drawing functions	

	Antilight interference function:	can work properly in direct sunlight condition
<b>Standard Accessories</b>	Remote Control:	TV Remote control
	Power cable :	1.5m
	HDMI cable :	1.5m (without PC )
	USB line	3M(without pc )
	CD:	1pc(without pc )
	Pen without ink :	2Pcs
	Warranty Card :	1Pc
	User manual :	1 pcs
	Wall brackets	1Unit ( for free )
<b>OPS</b>		<b>Version2</b>
	Mother board	Intel H81
	CPU :	Intel I3 4160 3.6GH2 Dual core
	RAM :	DDR III 4GRAM
	HDD :	500G
	WIFI:	802.11b/g/n
	OPS box size :	192*180*42mm
	Display :	Intel HD Graphics 4400
	Winsystem	Windons8 .1 ( Win7 can not support 4K)
	wireless Mouse :	Optional
		<b>Version3</b>
	Mother board	Intel H81
	CPU :	Intel I5 4460 3.2GH2 Dual core
	RAM :	DDR III 4GRAM
	HDD :	500G
	WIFI:	802.11b/g/n
	OPS box size :	192*180*42mm
	Display :	Intel HD Graphics 4400
	system	Windons8 .1 ( Win7 system can not support 4K)
	Wireless mouse :	Optional